



NEW

GPON READY







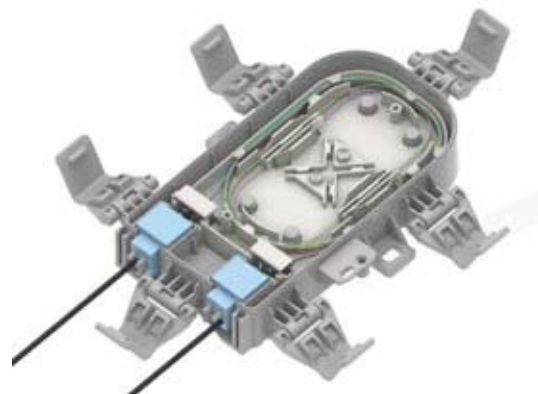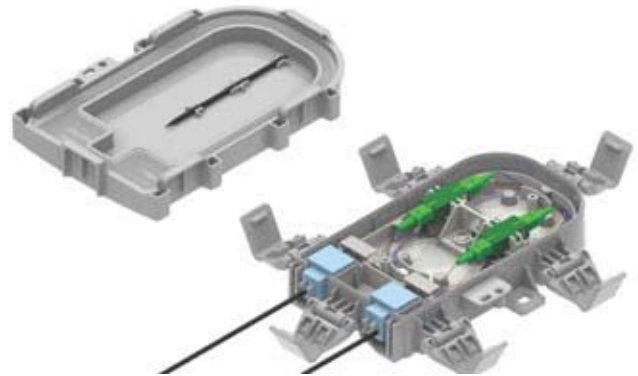



5G READY

The COYOTE® STP-JR (Service Termination Point) is a small closure which provides an alternative to traditional network interface devices, while offering much greater application flexibility. The robust latch system, paired with an integrated overmolded cover, allows for quick re-entry and creates a secure seal over a wide range of cable profiles. The closure could be installed indoors or outdoors on a pedestal, wall or pole.

- ▶ Maximum capacity 4 drop cables
- ▶ Maximum capacity 12 splices
- ▶ Maximum capacity of adapter is 2× SC
- ▶ Possibility of PLC splitter placement (max. length 40 mm)
- ▶ Applications below grade, direct buried, pole/wall mount, and pedestal mount
- ▶ Supports up to 2 single or multi-hole bushings covering a cable  $\varnothing$  2.4 mm–14 mm
- ▶ Re-enterable and reusable
- ▶ Designed to the TELCORDIA GR-771-CORE standard
- ▶ Constructed with UV stabilized, flame retardant material



### STP-JR BUSHINGS

	Solid / Plug
	4.3–5.6 mm Round Cable
	5.6–6.9 mm Round Cable
	6.9–5.1 mm Round Cable
	8.1–9.4 mm Round Cable
	9.4–10.7 mm Round Cable
	10.7–11.9 mm Round Cable
	11.9–14.0 mm Round Cable
	4× 2.4–3.2 mm Round Drop Cable
	4× 3.8 mm Round Drop Cable

### TECHNICAL SPECIFICATIONS

Bushings	2× Multi-Hole
Coverage degree	IP 68
Self-extinguishing degree	V0 to UL 94 – 5VA Rated
Solar radiation (UV)	EN 60068-2-5
Colour	Grey
Material	Polycarbonate
Dimensions	200 × 125 × 49 mm