


Z238

AIR BLOWN UNIT

Air Blown Unit 3.2 mm max. 24F

18.8.2016 ver.8

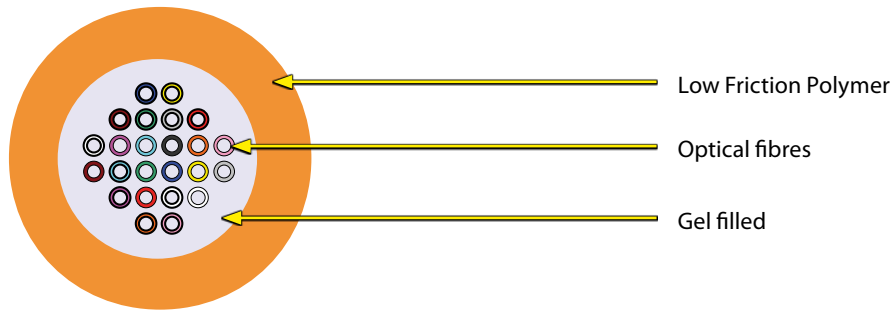

MECHANICAL AND ENVIRONMENTAL PROPERTIES

Test	Value	Unit	Method
Cable outer diameter	3.2 ± 0.1	mm	EN 60811-1-1
Cable weight	10	kg/km	
Outer jacket thickness	0.7	mm	
Coefficient of friction	0.09		
Max. tensile strength	70	N	EN 60794-1-21-E1
Crush resistance test	1000	N	EN 60794-1-21-E3
Impact resistance test	3	Nm	EN 60794-1-21-E4
Min. bend radius (no load)	10	× OD	EN 60794-1-21-E11a
Min. bend radius (load)	15	× OD	EN 60794-1-21-E11b
Moisture resistance test	pass		EN 609794-1-22-F5
Temperature range			
- Installation	-5 to +50	°C	EN 60794-1-22-F1
- Operation	-20 to +70		
- Storage	-20 to +70		

Cable life time – minimum 30 years

FIBRE COLOUR CODING (According to IEC 60304)

1	Red	9	Turquoise	17	White*
2	Green	10	Black	18	Grey*
3	Blue	11	Orange	19	Brown*
4	Yellow	12	Pink	20	Violet*
5	White	13	Red*	21	Turquoise*
6	Grey	14	Green*	22	Natural*
7	Brown	15	Blue*	23	Orange*
8	Violet	16	Yellow*	24	Pink*

* with black rings

Other fibre colour sequences available on request

SHEAT MARKING

Print colour	White
Print method	INK-Jet
Print legend	Manufacturer's name, job number, type of cable, length marking @ 1 m intervals

Other print legends available on request

PACKING

Depending on ordered put-up lengths

