




The Fiber Optic Box ORM 3 L/2 is designed for the placement of 2 optical connectors both indoors and outdoors. The box may be complemented by a simple bracket for being post-mounted.

- ▶ Capacity up to 2x SC connector
- ▶ Connector holder SC simplex/duplex
- ▶ Placement of optical fiber reserve, length 1 m
- ▶ Dividable rubber bushing 2x 1–3 mm
- ▶ Easy assembly
- ▶ Wall-mounted or post-mounted
- ▶ Coverage degree IP 54
- ▶ Use for fibers G657 a, b

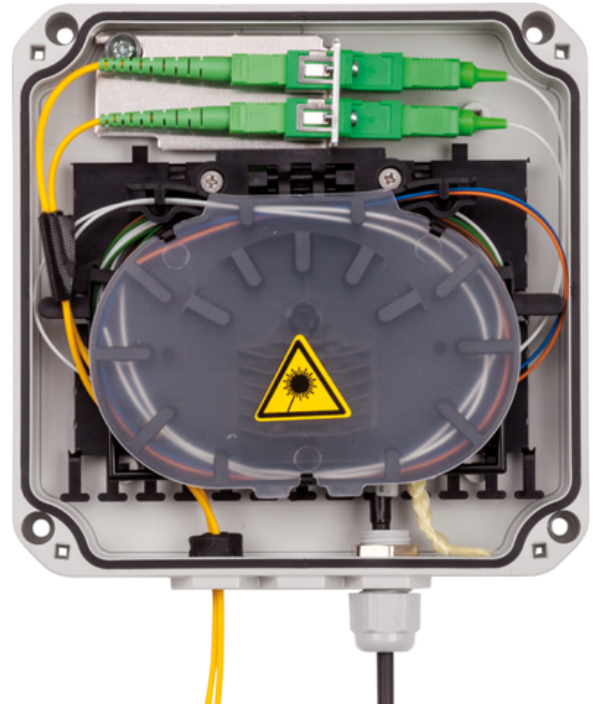

TECHNICAL SPECIFICATIONS

Inputs / Outputs (quantity × range)	1 × 3–6.5 mm, 4 × 1–3 mm
Grommets (type and number of used grommets)	1 × PG7, 2 × rubber grommet
Ingress Protection	IP54
Impact Protection	IK10
UV Resistance	yes
Flammability Degree	V0
Material	PC / ABS
Color	light gray RAL 7035
Dimensions (H × W × D)	136 × 136 × 46 mm
Weight	0.4 kg

ORDERING CODES

85K3.40/0000F	ORM 3 L/2
85K3.11/BAL0F	Pole Bracket for ORM 3



More information: <https://www.micostelcom.com/en/fiber-optic-boxes/fiber-optic-box-orm-3-l-2>

MICOS
TELCOM s.r.o.

+420 582 307 511
+420 582 307 688

telcom@micostelcom.cz
www.micostelcom.com