



The Fiber Optic Patch Panel ORMPM 3U/144 is designed for the placement of 144 optical connectors into 12 vertical modules indoors. It is designed for installation in a 19" rack.

- ▶ Capacity 144 optical connectors
- ▶ Connector holder SC simplex, E2000
- ▶ 12 vertically placed modules
- ▶ Placement of optical fiber reserve
- ▶ Installation into a 19" frame
- ▶ High 3U
- ▶ Possibility of installing both the front and the rear support rails
- ▶ Possibility of horizontal sliding




TECHNICAL SPECIFICATIONS

Material	painting AlMg3
Color	light gray RAL 7035
Dimensions (H × W × D)	130 × 483 × 250 mm
Weight	3.2 kg

ORDERING CODES

8562.00/0000F	ORMPM 3U/144 (fixed mounting kit)
8562.10/SC00F	Module 12× SC
85R6.00/0000F	ORMPM 3U/144 PL (adjustable mounting kit)
8562.25/0000F	Box for reserves 1U
8562.15/0000F	Box for reserves 2U
8562.34/0000F	Box for reserves – rear entry without rings
8562.80/0000F	Box for reserves – rear entry with cable rings
8562.18/PLEXF	Plexi for ranging panel
8562.18/PAN0F	Ranging panel
8562.18/0000F	Ranging panel with plexi
8562.11/0000F	Cable lead panel ORMPM 3U
8562.38/000CF	Blinding panel
8562.39/000CF	Blinding module
491582	Corrugated tube 4.8 × 7.1 mm

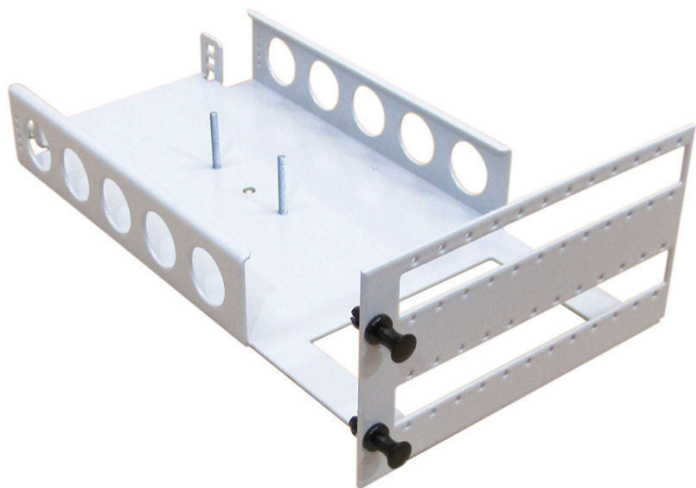

More information: <https://www.micostelcom.com/en/fiber-optic-patch-panels/ormpm-3u-144-module-odf>

MICOS
TELCOM s.r.o.

+420 582 307 511
+420 582 307 688

telcom@micostelcom.cz
www.micostelcom.com