



- ▶ Placement of 12 splices
- ▶ Material – plastic
- ▶ The possibility of a packet assembly
- ▶ Dimensions – 152 × 102 × 8 mm
- ▶ Recommended for distributor range ORM, ORMP, ORMPV, ORS, SNM, ORMPTR, SOP, POR, ORMPM

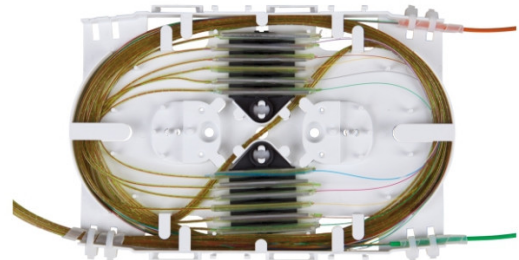

TECHNICAL SPECIFICATIONS

| | |
|------------------------|------------------|
| Flammability Degree | HB |
| Material | ABS |
| Color | black RAL 9005 |
| Dimensions (H × W × D) | 8 × 152 × 102 mm |
| Weight | 0.1 kg |

ORDERING CODES

| | |
|--------------|---------------------------------|
| 8510.12/0000 | Lid for KM1 |
| 8510.12/B000 | Lid for splice tray KM1 – white |
| 8523.40/0000 | Splice tray KM1 |
| 8523.40/B000 | KM1 – white |

More information: <https://www.micostelcom.com/en/fiber-optic-trays/splice-tray-km1-with-accessory>