



MICOS

COYOTE® DOME BT UO

FIBER OPTIC CLOSURES

NEW

GPON READY

5G READY

The Fiber Optic Closures COYOTE® DOME BT UO are a group of fiber optic closures using both stacking system and classic BT fiber optic trays for accessible fiber management in large trays. The closures are extremely durable and adapted to permanent immersion in water (IP68). The closures have a unique grommets system for easy installation.

- ▶ Capacity of up to 192 splices (for the COYOTE® DOME ONE)
- ▶ Capacity of up to 336 splices (for the COYOTE® DOME 617)
- ▶ Capacity of up to 504 splices (for the COYOTE® DOME 622)
- ▶ Scalable through gradual adding of trays
- ▶ Support for hinged splice trays
- ▶ Support for adapter splice trays or panels
- ▶ PLC Splitter capability (small format)
- ▶ Support for ribbon fibers
- ▶ Support for midspan (loop-through) cable
- ▶ Unique grommets system for cables with diameters 2.4–31.8 mm
- ▶ Increased impact protection and water ingress resistance even when permanently immersed in water (IP68)
- ▶ Optional pole and wall bracket
- ▶ Suitable for all types of networks



COYOTE® DOME ONE



COYOTE® DOME 617




COYOTE® DOME 622



BT SYSTEM

- For splicing
- Up to 72 splices
- Hinged or stackable mounting

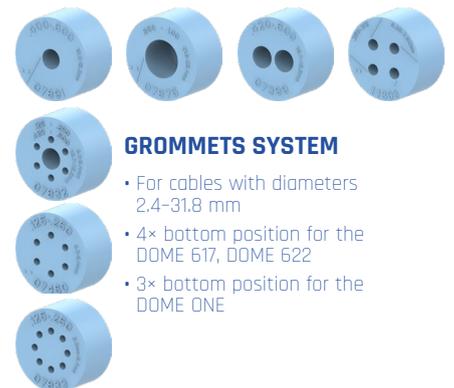

GROMMETS SYSTEM

- For cables with diameters 2.4–31.8 mm
- 4× bottom position for the DOME 617, DOME 622
- 3× bottom position for the DOME ONE



COYOTE® DOME 617 BT UO-GKNN-FFFN



COYOTE® DOME ONE BT UO-GGK-HHNN
(tilted trays)



COYOTE® DOME 622 BT UO-EEEN-AAAAAAA
(midspan (loop-through) cable installation)



Hinged BT Fiber Optic Tray High Short,
Adapter Panel 24x LC

TECHNICAL SPECIFICATIONS

Inputs / Outputs (quantity × range)	4× or 3× 2.4–31.8 mm (follow the Configurator – Section 1 – Grommets Selection)
Grommets (type and number of used grommets)	Grommets System – 4 or 3 pcs
Ingress Protection	IP68
Impact Protection	IK10
Material	PP
Color	Black RAL 9005
Dimensions (H × ø) DOME 617	463 × 218 mm
Dimensions (H × ø) DOME 622	574 × 218 mm
Dimensions (H × W × D) DOME ONE	406 × 274 × 145 mm
Weight (DOME 617 / DOME 622 / DOME ONE)	4/5/3 kg

ORDERING CODES

On request	Custom Configuration
85100075	COYOTE® DOME 617 BT UO
85100074	COYOTE® DOME 622 BT UO
85100073	COYOTE® DOME ONE BT UO
Follow the Configurator (Section 1)	Grommets Kit Separately
Follow the Configurator (Section 2)	Tray Kit Separately
58810955	Universal Mounting Bracket for DOME Closures
8003835	Plastic Pole and Wall Bracket DOME
8004004	Stainless Pole and Wall Bracket DOME ONE

More information:

<https://www.micostelcom.com/en/fiber-optic-closures/coyote-dome-bt-uo>